



# UV-B Narrowband TL

## TL 120W/01

More than 400 independent clinical studies have proven that the UVB Narrowband treatment is safer and more effective than any other treatment in its class. Lamps installed in such phototherapy treatment systems emit only a very narrow waveband from the 'B' bandwidth of the UV spectrum (290 to 315). Philips offers lamps with narrow waveband of between 305 and 315 nm which peaks at 311 nm. This makes these lamps very suitable for Clinical and Home UV-B Narrowband phototherapy systems which treat skin diseases such as psoriasis and vitiligo. N.B.: Our UVB lamps are NOT registered with FDA as medical devices as they are NOT packaged or labeled for commercial distribution for health-related purposes. US customers are referred to the UVB and UVA lamp range brochure US version.

### Product data

General Information	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
Main Application	Phototherapy Systems
Life to 50% Failures (Nom)	1000 h
Useful Life (Nom)	1000 h
Light Technical	
Color Code	01
Color Designation	Ultra Violet B
Chromaticity Coordinate X (Nom)	220
Chromaticity Coordinate Y (Nom)	220
UV Depreciation at 500 h	10 %
UV Depreciation at 1000 h	15 %
Operating and Electrical	
Power (Nom)	116 W
Lamp Current (Nom)	1.110 A

Voltage (Nom)	127 V
Mechanical and Housing	
Cap-Base Information	No Adaptor
UV	
UV-B Radiation 100 hr (IEC)	17 W
UV-B Radiation 5hr (IEC)	19.7 W
Product Data	
Full product code	871150026483140
Order product name	TL 120W/01
EAN/UPC - Product	8711500264831
Order code	928035200101
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928035200101


## UV-B Narrowband TL

Net Weight (Piece)

502.000 g

### Warnings and Safety



### Dimensional drawing

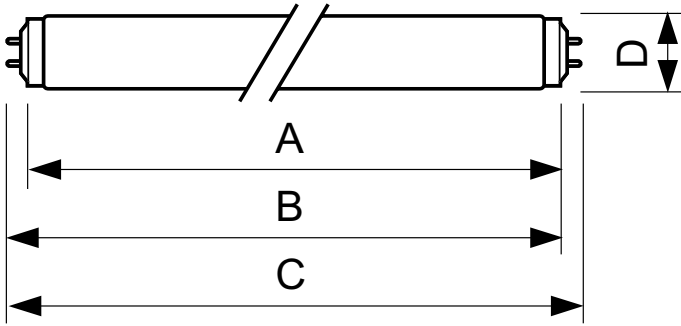

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL 120W/01	40.5 mm	2000 mm	2007.1 mm	2004.7 mm	2014.2 mm

TL 120W/01

### Photometric data

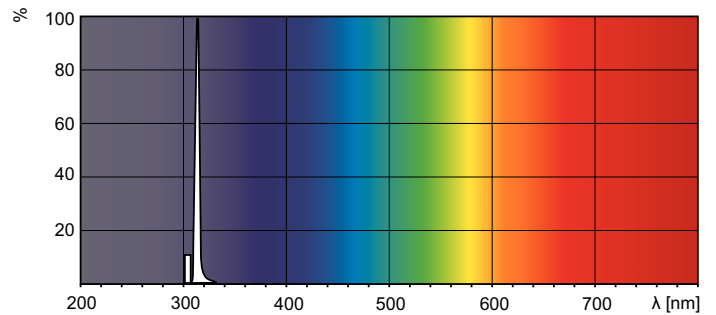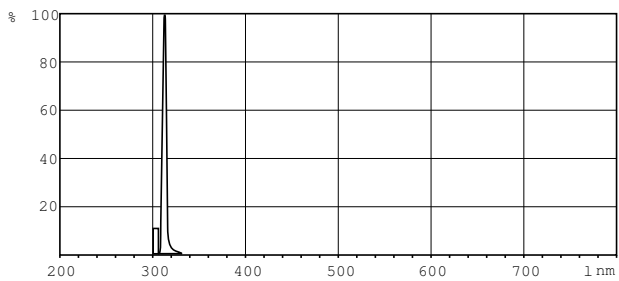

XDPB\_XUMTL\_01-Spectral power distribution B/W

